

Journal of Advances in Microbiology

18(3): 1-15, 2019; Article no.JAMB.51293

ISSN: 2456-7116

Comparative Effects of Conventional and Non-Conventional Flocculants and Disinfectants on Microbial Contaminants in Water Purification

F. B. Omiyale^{1*} and F. O. Ekundayo¹

¹Department of Microbiology, Federal University of Technology, Nigeria.

Authors' contributions

This work was carried out in collaboration among all authors. Author FOE designed the study and wrote the protocol. Author FBO managed the analyses of the study and wrote the first draft of the manuscript. Author FBO managed the literature searches, performed the statistical analysis. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/JAMB/2019/v18i330172

Editor(s).

(1) Dr. Pankaj Kumar Assistant Professor Department of Microbiology Dolphin (PG) Institute of Biomedical and Natural Sciences Manduwala, Dehradun, Uttarakhand, India.

Reviewers

(1) Hideharu Shintani, Chuo University, Japan.

(2) Stig Morling, Royal Institute of Technology, Sweden.

(3) Nidhal Marzougui, National Research Institute for Rural Engineering, Tunisia. Complete Peer review History: https://sdiarticle4.com/review-history/51293

Original Research Article

Received 19 July 2019 Accepted 01 October 2019 Published 12 October 2019

ABSTRACT

This work compares the effect of alum, a conventional flocculant to the bioflocculant isolated from *Bacillus subtilis* and *Moringa oleifera* seed powder (non conventional bioflocculants) and chlorine as disinfectant on microbial contaminants in water purification. Bioflocculant was purified from the sand sediments of Onyearugbulem market, jar test method was used in bioflocculating activity and dosage. Bioflocculant purified from *Bacillus subtilis* isolated from the sediments of Onyearugbulem market stream inhibited the growth of coliform for well, stream and abattoir waste water samples. On the other hand, alum sulfate when compared with bioflocculant at a dosage level of 200 mg for well and stream waters and 800 mg for abattoir waste water yielded flocculating activities of 87.33%, 78.42% and 24.60%. This indicates that purified bioflocculant was more effective than alum sulphate. Bioflocculant produced from *Bacillus subtilis* should be exploited in water treatment. *Moringa oleifera* seed powder exhibited both flocculating and disinfecting potentials in water treatment but not effective in the treatment of abattoir waste water.

Keywords: Bioflocculant; Moringa oleifera seed powder; waste water; abattoir effluent; water treatment; chlorination; aluminum sulphate; jar test.

1. INTRODUCTION

Forms by which water pollution can be accessed can be classified under three major headings: physical, chemical and biological methods [1].

This is characterized by the presence of objects and materials in water. These materials both particulate and dissolved impurities. The load of particulate and dissolved impurities in a water body can be accessed by measuring the turbidity of such water body. Water intended for drinking should not contain any foreign body; it must be clear and colorless. Other uses of (such as agricultural and aesthetic purposes) water may permit the presence of certain materials [2].

This is characterized by a change in the chemical composition of the water. Water is made up of two atoms of hydrogen and one atom of oxygen. When there is an addition or subtraction from the chemical composition of water, such water is not fit for consumption. The following can be used to access the chemical composition of water: composition of trace metals and radionuclides, hardness, total dissolved solids and total soluble solids. Water fit for drinking must be tasteless and odorless [3].

This is characterized by the presence of microorganisms and organic materials that serve as nutrients for the growth these microorganisms. These microorganisms are bacteria, fungi, protozoan and algae. Any water that contains these microorganisms is not safe for drinking [4].

An abattoir can be defined as any premise used for or in connection with the slaughter of animals whose meat is intended for consumption [5]. Waste waters from abattoirs are concentrated with source of oxygen consuming wastes. Abattoirs generally use large quantities of water for washing meat and cleaning process areas; they are usually located near large bodies of water for washing meat and processing [6]. Abattoir effluents are rich in organic nutrients [7] one of which is nitrogen.

Flocculation is a stage in water purification which involves the gentle mixing of water. It brings about increase in particle size from submicroscopic micro-floc to visible suspended particles. On the addition of inorganic polymers such as alum and poly-aluminum chloride, floc

size continues to build with additional collisions and interaction. Flocculation is a physical and chemical process used for the removal of the visible sediments and material from water which makes it a colloidal solution. This can be achieved through agitation or by the addition of flocculating agents [8]. Chemical flocculants include clarifying agents such as Iron (II) sulphate, Aluminium sulphate, and Iron (II) chloride in water treatment which results in the formation of colloids [9].

Bioflocculants microorganism-produced are natural inorganic macromolecule substances that can flocculate suspended solids. cells and colloidal solids [10]. Several microorganisms which secrete flocculation biopolymer have been screened and isolated from activated sludge, waste water, and soil [10]. Species of microorganisms that bioflocculant producing characteristics include bacteria (such as Bacteroidites, Bacillus sp., Bacillus muscilaginosus. Bacillus subtilis) fungi. actinomyces and algae (Chlamydomonas reinhardtii. Chlorella minutissima) Bioflocculants stands out among others as they have the advantage of innocuousness. biocompatibility, biodegradability environmental friendliness, unlike organic and inorganic flocculants which are toxic and whose degradation intermediates are difficult to remove from the environment [12]. Besides, organic flocculants such as polyacry lamide and polyethylene imine derivatives have been implicated in adverse human health effects [13]. Conversely, the enormous advantages associated with bioflocculants motivate its consideration as an alternative, hence the vast interest in the scientific and industrial community worldwide [14].

Chlorination is defined as a form of chemical treatment of water that involves the addition of chlorine (Cl₂) or hypochlorite to water. Chlorination plays a key role in wastewater treatment of water processes by removing pathogens and other physical and chemical impurities. The effects of chlorine in waste water treatment include: disinfection, controlling odor and septicity, aiding scum and grease removal. Chlorination also help to control activated sludge bulking foaming. It stabilizes waste activated sludge prior to disposal, destroys cyanides, removes phenols and ammonia [15].

1.1 Description of Study Area

Onyarugbulem abattoir got its name from the market (modern) and office complexes to the north of abattoir built by Navy Captain Anthony lbe Onvearugbulem (1955-2002) who served as the military administrator of Ondo State during regime of General Sani Abacha. Onvearugbulem abattoir was selected as the study area because of its location in the large expanse of built up area comprising of low medium and high income earners with residential buildings in the north by office complexes and west and east by private schools and ships. The abattoir is about 50 meters off the express (Ilesha-Owo) and covers about 1000m² land mass. The abattoir is located within Akure metropolis, Nigeria.

2. MATERIALS AND METHODS

2.1 Separation and Purification of Bioflocculants

Purified isolates were introduced into 50 ml of bio-flocculant production medium and then incubated for 3days. The culture broth was diluted into two volumes of distilled water and centrifuged at 4,000 rpm for 15 minutes. The supernatant was poured into three volumes of acetone (1:3) and added three times to precipitate the biopolymer flocculant. The precipitate was then centrifuged at 8000 rpm for 20 mins and washed by ether. The crude obtained was dialyzed at 4°C overnight in deionized water and vacuum dried overnight in a desiccator to obtain pure bio-flocculants [16].

2.2 Jar Test Determination of Bioflocculant Dosage and Measurement of Bioflocculaing Activity

Different concentrations (0.1 to 1.0 mg/mL) of purified bioflocculant were prepared. Their flocculating activities were measured against 4gL kaolin clay suspension. A 3.0 mL of 1% (w/v) CaCl₂ was added to the different concentrations of the purified bioflocculant and mixed with 100 mL of kaolin clay suspension in 500ml beakers. The solution was rapidly mixed at 160 rpm for 2 minutes, followed by gradual flocculation at 40 rpm for 2 minutes and sedimentation for 5 minutes. After sedimentation, 2 mL was gently withdrawn from the upper clarifying phase in order to measure the flocculating activity. The

concentration dosage that gave the best flocculating activity was used for subsequent experiment [16].

2.3 Preparation of Dialyisis Bag

Ethylene diamine tetraacetic acid (EDTA) (0.27 g) was weighed into 100 mL of distilled water which was boiled. The dialysis bag was placed in the boiling water and was made to boil. The bag was removed and rinsed with distilled water. This process aids easy opening of the dialysis bag [16].

2.4 Preparation of Moringa Seed Powder, Alum and Chlorine for Water Treatment

Good quality Moringa oleifera seeds were harvested from FUTA area and made to dry in the sun. The pods and shell were removed after drying after which it was blended with the aid of an electric blender. The resulting powder was used in the water treatment process as a biological flocculant and disinfectant. This was used in varying quantities for the treatment of the water samples of 1000 mL in the following quantities: 0.1 g, 0.2 g and 0.4 g. Three hundred grams (300 g) of aluminum potassium sulphate purchased from Akure market was crushed using mortar and pestle. It was then employed in the water treatment process with in varying quantities (0.1 g, 0.2 g, 0.4 g) to 1000 mL of the waters sample. Sodium hypochlorite was used in concentrations of 1, 2 and 4 mL to disinfect 1000 mL of stream water and 2,4 and 8 mls to disinfect 1000 mL of abattoir water [17].

2.5 Water Treatment with Varying Dosage of Alum, Biofloculant, Chlorine and *Moringa oleifera* Seed Powder

2.5.1 Test for best concentration of treatment agent

Different concentrations such as the recognized and recommended dosage, half of recommended dosage and double dose of treatment agents (alum, bioflocculant, chlorine and moringa) were used to detect the dosage best fit for the treatment analysis. After allowing the water sample to sit for a 30 minute period after collection, the supernatant was carefully collected in another clean container; 1000 mL of each water sample was in triplicate differently dosed with the recommended dosage, half of the

recommended and double dose of the recommended. The optical density of the water samples were detected with the aid of a spectrophotometer 30 minutes after treatment and 24 hours after. The microbiological load was also detected after 30 minutes of treatment and 24 hours of treatment [16].

The selected dose for each of the treatment agents (alum, bioflocculant, chlorine moringa) were used to treat in triplicates1 liter of the collected water samples in sterilized containers the way it was done above. The treatment agents were used in the following order: each treatment agent: alum; bioflocculant; chlorine; moringa seed powder. Combinations of two treatment agents: Bioflocculant and chlorine; bioflocculant and moringa seed powder; chlorine and moringa seed powder. Combinations of three treatments; alum, bioflocculant and chlorine; alum, bioflocculant and moringa seed powder; alum, chlorine and moringa seed powder; bioflocculant, chlorine and moringa seed powder. Then all the four treatment agents combined alum, bioflocculant, chlorine and moringa seed powder. Each of these water samples had a control where the above listed agents were not added [17,16].

The optical density of the water samples were detected with the aid of a spectrophotometer at a wavelength of 550 nm 30 minutes after treatment and 24hours after. The microbiological load was also detected after 30 minutes of treatment and 24 hours of treatment [16-18]

A twenty milliliter (20 ml) of cell free supernatant suspension of the bio-flocculant was added to 1 liter each water sample and was allowed to stand for 10 minutes. The optical density of the clarifying solution was then measured with a spectrophotometer at 550 nm.

The flocculating ability of the bacterium polymer was measured using the equation;

Flocculating Activity (%) =
$$\frac{(B-A)}{A} X 100$$

Where A is the absorbance of the sample experiment, B is the absorbance of the control experiment at 550 nm [18,19].

2.6 Statistical Analysis

Data are presented as mean ± standard error (SE). Significance of difference between different

treatment groups was tested using one-way analysis of variance (ANOVA) and significant results were compared with Duncan's multiple range tests using SPSS window 8 version 20 software. For all the tests, the significance was determined at the level of P<0.05.

3. RESULTS

Flocculating activities of water samples treated with alum recorded their highest flocculating activities with increased dosage. Flocculating activities increased after 24 hours of treatment as against the flocculating activities recorded after 30 minutes of treatment. The flocculating activities recorded when well and stream waters were treated had flocculating activities above average while that of abattoir waste water was between the range of 21-25% (Table 1).

Table 1 also contain the flocculating activities suggesting the best dosage of bioflocculant treatment for water samples. Highest flocculating activities were recorded with the highest bioflocculant concentration with the exception of stream water after 30 minutes of treatment which its recorded highest flocculating activities when 0.5 mL of bioflocculant was used in water treatment. Abattoir waste water recorded its highest flocculation after 30 minutes of treatment with 0.5 mL, the flocculating activity reduced after 24 hours. Treatment with 1.0 mL of bioflocculant reduced flocculating activity after 24 hours treatment.

Well water when treated with *Moringa oleifera* seed powder had a steady increase in its flocculating activity over time with increase in its doses. Increase in flocculating activity was also recorded after 24 hour treatment period. The case was also the same with stream and abattoir waste waters. However, the flocculating activity of abattoir waste water was low when placed side by side with well and stream waters (Table 1).

When treatment combinations alum, bioflocculant, chlorine, and *Moringa oleifera* seed powder was applied in the treatment of well water, treatment with alum alone yielded the least flocculating activity. Combined treatment of alum and bioflocculant had the highest flocculating activity. There was a slight increase in the flocculating activity after 24 hours of treatment (Fig. 1).

Singular treatment of stream water with chlorine yielded the lowest flocculating activity. Combined

treatment of AB had the highest flocculating activity with B, BM, ABM, ACM, BCM and BM following closely. All these treatment combinations recorded slight increase in its flocculating activity after 24 hours treatment (Fig. 2).

Singular treatment of alum recorded the lowest while the highest flocculating activity was recorded when the combined use of alum and bioflocculant was used in abattoir waste water treatment (Fig. 3).

Table 2 presents number of coliform growth colonies on the agar plate. Number of growth colonies reduced with increased concentration and time in all the water samples treated. However the lowest numbers of colonies was recorded in well water and highest in abattoir waste water.

Total bacterial growth of water samples treated with varying concentrations of alum is presented in Table 2. Number of colonies reduced with increased concentration and time in the treatment of well and stream water samples. After 30 minutes treatment with alum at 400 mg concentration, flocculating activity increased beyond that of 200 mg. the flocculating activity however reduced after 24 hours of treatment.

Bioflocculant treatment yielded significant reduction in the numbers of coliform colonies

with increased dosage and time when treated with stream water. Abattoir waste water followed the same sequence. However in the treatment of AWW, the number of colonies were greatly increased (Table 3). Treatment of water of water samples with bioflocculant yielded steady decrease in the flocculating activities of the water samples with increased concentration of treatment agent and time (Table 3).

About 90% reduction was recorded when *Moringa oleifera* seed powder was used in the treatment of water samples in the number of coliform with respect to concentration and time (Table 4). Steady decrease was recorded in the bacterial population with increased concentration and treatment time (Table 4).

Fig. 4 shows the effect of treatment combinations on the number of coliform for well well water sample. Treatment combinations BM, CB, ABC, ABM and ACM yielded no growth. Singular treatment with alum yielded the highest number of colony after 30 minutes of treatment which further reduced after 24 hours.

Singular treatment of well water with chlorine yielded no bacterial growth. No colony growth was recorded with AM, AC, BC, CM, ABC, ACM, BCM, and ABCM. Highest number of colony was recorded after 24 hours of treatment with BCM (Fig. 5).

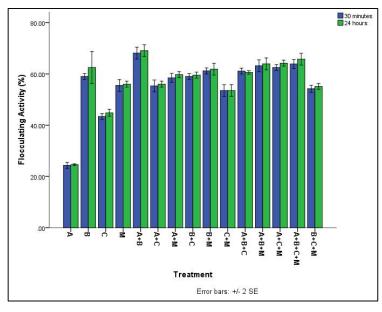


Fig. 1. Flocculating activities of well water samples treated with different Combinations

KEY A- Alum B- Bioflocculant C-Chlorine M-Moringa

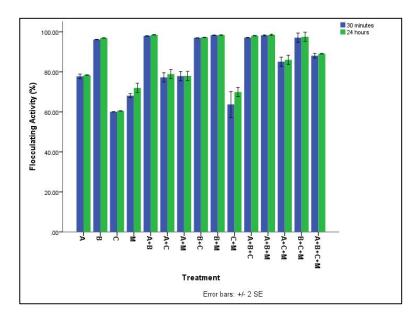


Fig. 2. Flocculating activities of stream water sample with different treatment combinations

KEY A- Alum B- Bioflocculant C-Chlorine M-Moringa

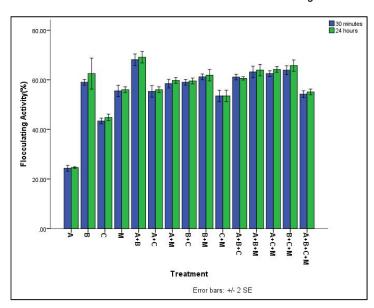


Fig. 3. Flocculating activities of abattoir waste water sample with different treatment combinations

KEY A- Alum B- Bioflocculant C-Chlorine M-Moringa

In Fig. 4, highest number of colonies was gotten after 30 minutes of treatment with alum which subsequently reduced after 30 minutes. No coliform growth was observed with BM, CM, ABC, ACM, BCM, ABCM.

Fig. 5 shows that no bacterial growth occurred with the following treatment patterns: C, CM,

ABC, ACM. Highest number of bacterial growth was recorded with A.

No coliform growth was recorded in the treatment of AWW with AC, CM, ABC, ABM, BCM and ABCM. Highest FA was recorded in alum and AM after 30 minutes of treatment with significant reduction after 24 hours (Fig. 6).

Table 1. Flocculating activities suggesting the best dosage of alum, bioflocculant and Moringa oleifera seed powder treatment for the water samples

Dosage	(mg/L)	50	100	200	(ml/L)0.5	1.00	2.00	(g/L)50	100	200
Well	30 mins					00_0.00	00.0. = 0.00			00.00-0.00
	24 hrs	75.34±0.58	^a 76.53±0.53 ^a	87.33±0.58 ^c	69.55±1.15 ^a	88.09±1.15	^b 88.65±1.21 ^t	66.98±0.59°	^a 67.50±0.33 ^a	73.43±2.84 ^a
Stream	30 mins			78.20±0.64 ^b						
	24 hrs			87.33±0.58 ^b						
Abattoir waste water	30 mins			24.30±0.58 ^b						
	24 hrs	23.45±0.58	^a 21.48±0.00k	24.60±0.15 ^b	23.45±0.58a	21.48±0.00	^b 24.60±0.15 ^t	47.20±0.00°	³ 55.00±1.15b	58.01±0.58 ^b

Data are presented as Mean ± S.E (n=3). Values with the same superscript letter(s) along the same row are not significantly different (P<0.05)

Table 2. Coliform growth and total bacterial growth of water samples treated with alum using varying concentrations

Dosage			Coliform growt	h		Total bacterial growth		
	(mg/L)	0.5	1.0	2.0	0.5	1.0	2.0	
Well	30 mins	14.33±1.20 ^a	14.00±0.58 ^{ab}	11.00±0.58 ^b	22.33±0.88 ^a	21.67±0.88 ^a	20.00±0.58 ^a	
	24 hrs	11.66±0.88 ^a	11.00±0.58 ^{ab}	10.00±0.58 ^b	20.00±0.58 ^a	19.67±0.67 ^a	19.00±0.58 ^a	
Stream	30 mins	24.00±0.57 ^a	21.00±0.58 ^b	22.33±0.88 ^b	33.33±0.88 ^a	30.00±0.58 ^b	27.33±0.33 ^c	
	24 hrs	22.00±0.57 ^a	20.67±0.88 ^a	19.33±0.33 ^a	29.67±0.88 ^a	28.00±1.00 ^a	27.33±0.33 ^a	
Abattoir waste water	30 mins	64.66±1.45 ^a	57.67±0.88 ^b	47.00±1.15 ^c	75±1.73 ^a	66±1.15 ^b	73±0.58 ^b	
	24 hrs	61.00±0.57 ^a	54.00±0.57 ^b	44.00±0.57 ^c	69.33±0.33 ^a	61.00±0.58 ^{ab}	41.00±10.50c	

Data are presented as Mean ± S.E (n=3). Values with the same superscript letter(s) along the same row are not significantly different (P<0.05)

Table 3. Coliform growth and total bacterial count of water samples treated with bioflocculant using varying concentrations

Dosage		Coliform growth			Total bacterial growth		
	(mg/L)	50	100	200	50	100	200
Well	30 mins	15.67±0.67 ^a	7.3±1.45 ^b	0.67±0.67 ^c	30.006±0.58 ^a	27.00±1.15 ^b	24.00±0.58 ^c
	24 hrs	12.33±1.45 ^a	5.00±1.15 ^b	0.00 ± 0.00^{c}	28.00±0.58 ^a	25.00±0.58 ^b	22.00±1.15 ^c
Stream	30 mins	7.00±0.58 ^a	3.33±0.88 ^a	4.00±0.58 ^b	26.00±2.08 ^a	20.00±0.58 ^b	18.00±0.58 ^c
	24 hrs	5.33±0.88 ^a	2.67±0.88 ^a	1.33±0.33 ^b	24.68±1.76 ^a	18.33±0.33 ^b	16.67±0.89 ^c
Abattoir waste water	30 mins	183.67±0.88 ^a	180.00±0.58 ^b	78.33±0.33 ^c	200.00±0.00 ^a	199.00±0.50 ^a	93.33±0.88 ^a
	24 hrs	181.00±0.58 ^a	178.00±1.52 ^b	77.00±0.58b	198.00±0.58 ^a	199.33±0.88b	87.33±0.88 ^c

Data are presented as Mean ± S.E (n=3). Values with the same superscript letter(s) along the same row are not significantly different (P<0.05)

Treatment with M, CM, ABC, ABM, ACM, BCM and ABCM did not yield any growth in the treatment of AWW. Highest FA was recorded

with treatment after 24 hours. Treatment with bioflocculant did not bring about any change with time (Fig. 7).

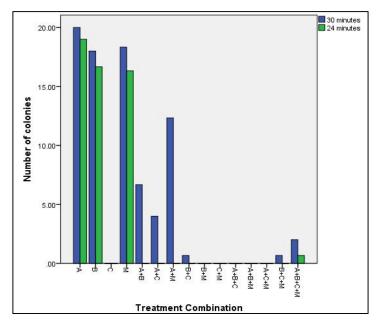


Fig. 4. Effect of various treatment combinations on the number of coliform bacteria for well water sample



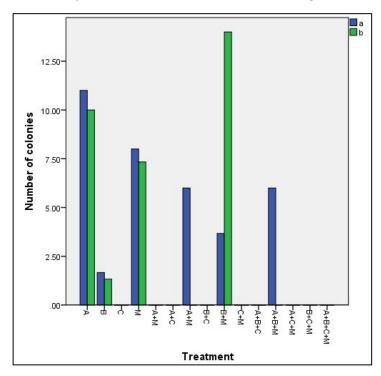


Fig. 5. Effect of various treatment combinations on the number of bacteria for well water sample

Key A- Alum B- Bioflocculant C-Chlorine M-Moringa

Table 4. Coliform growth and Total Bacterial Count of water samples treated with Moringa oleifera seed powder using varying concentrations

Dosage			Coliform growth			Total bacterial growth		
	(mg/L)	50	100	200	50	100	200	
Well	30 mins	56.33±0.88 ^a	52.67±1.20b	8.00±0.58 ^c	94.67±0.88 ^a	80.33±0.88 ^b	18.33±0.33 ^c	
	24 hrs	52.33±1.45 ^a	49.67±1.20 ^b	7.33±0.33 ^b	90.00±0.58	70.00±0.58 ^b	16.33±0.33 ^c	
Stream	30 mins	95.67±1.20 ^a	32.67±1.45 ^b	21.00±0.58c	121.67±1.20 ^a	73.00±1.15 ^b	26.00±0.58 ^c	
	24 hrs	70.00±2.51 ^a	30.00±4.58 ^b	18.00±0.58 ^c	140.67±2.17 ^a	62.00±1.15 ^a	24.00±0.58 ^b	
Abattoir waste water	30 mins	185.67±0.33 ^a	182.33±1.20 ^b	40.00±0.58 ^c	197.67±0.33 ^a	186.67±2.84 ^b	70.00±0.58 ^c	
	24 hrs	178.67±8.17 ^a	169.33±0.88 ^b	35.33±0.88 ^b	195.09±0.58 ^a	176.67±2.19 ^b	66.00±0.58 ^c	

Data are presented as Mean ± S.E (n=3). Values with the same superscript letter(s) along the same row are not significantly different (P<0.05)

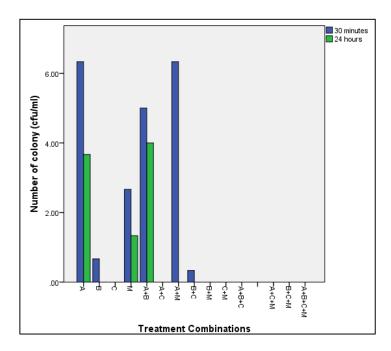


Fig. 6. Effect of various treatment combinations on the number of coliform bacteria for stream water sample

Key A- Alum B- Bioflocculant C-Chlorine M-Moringa

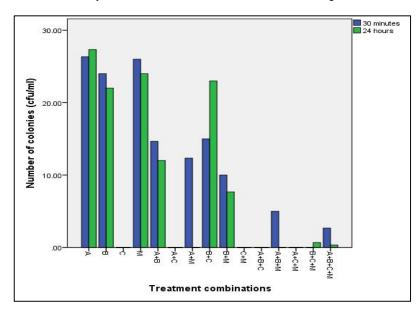


Fig. 7. Effect of various treatment combinations on the number of bacteria growth on NA for stream water sample

Key A- Alum B- Bioflocculant C-Chlorine M-Moringa

4. DISCUSSION

The array of bacteria isolated from the well water sample are typical of well water resident bacteria. Ugbenyen et al. [19] isolated *Klebsiella* sp,

Escherichia coli, Salmonella sp, Enterbacter and Proteus sp from well water sources in Bambui, Cameroon student residential area. Ngwa and Chrysanthus [20] also isolated E. Coli, Staphylococcus aureus, Pseudomonas sp,

Enterococcus sp and Enterobacter sp from well water sources in Wakuri, Nigeria. Agwaranze et al. [21] stated that most of the bacterial species isolated during their study are fecal related organisms. This indicates that these organisms might have been introduced into well water by fecal contamination. Nafarnda et al. [22] isolated basically E. coli and Fecal Streptococcus from stream water bodies with which abattoir waste effluents are discharged [23]. Isolated bacterial species from the genus Salmonella, Escherichia,

Shigella, Klebsiella, Streptococcus, and Staphylococcus from Ikpoba river, Nigeria. The presence of these organisms were as a result of faecal discharge into the water body in that the abattoir waste water contains high percentage of coliform bacteria because of the contents of the gastro-intestinal tracts of the slaughtered animals are discharged directly into the water. Nafarnda et al. [22] stated that the presence of faecal coliform may also indicate the presence of pathogenic viruses and protozoa.

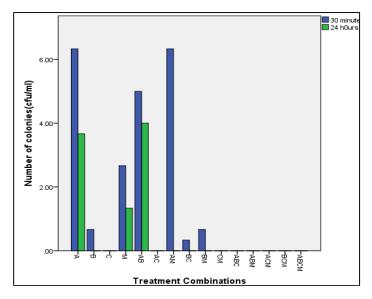


Fig.8. Effect of various treatment combinations on the number of coliform bacteria for abattoir waste water sample

Key A- Alum B- Bioflocculant C-Chlorine M-Moringa

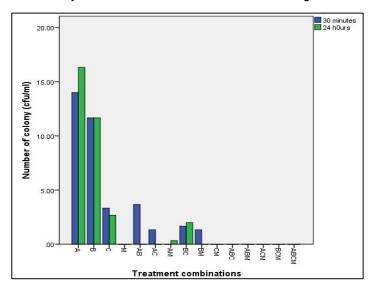


Fig. 9. Effect of various treatment combinations on the number of bacteria growth on NA for abattoir waste water sample

Key A- Alum B- Bioflocculant C-Chlorine M-Moringa

Virtually all the bacteria species isolated from stream water were found resident in the Onyearugbulem abattoir waste water. The reason cannot be farfetched based on the fact that the bacterial species found in the stream were sourced from the abattoir effluents. [24] stated that abattoir wastewater contains several million colony forming units (cfu) /100 ml of total coliform, fecal coliform, and Streptococcus groups of bacteria. The bacterial species isolated abattoir slaughtering site include: Escherichia coli, Citrobacter sp., B. subtilis, Bacillus cereus [25]), Micrococcus leteus and Klebsiella pneumoniae [26]. The bacterial species isolated from the stream bank are in relation with the ones isolated by Onuoha [27]. They are Staphylococcus aureus, Escherichia coli, Pseudomonas sp, Bacillus cereus, Proteus The bacteria species isolated from the stream sediments correlates with the ones isolated by [28]. They include Staphylococcus aureus, Klebsiella sp. Clostridium sp. Shigella sp. Pseudomonas sp, Escherichia coli Streptomyces sp, Salmonella sp, Bacillus cereus, Enterobacter sp. [29] isolated his bioflocculant producing bacteria from the sediments of a stream. This agrees with the findings of this research where two bacterial species (Bacillus subtilis and Streptomyces somaliensis) were isolated from Onyearugbulem stream sediments.

Nwodo et al. [13] used a consortium of *Streptomyces* and *Cellulomonas* isolated from Tyurine river in the eastern cape province of south Africa to produce bioflocculant which was capable of initiating flocculating activities between 78 -91%. [30] isolated and produced biopolymer from *Streptomyces griseus*. This biopolymer was capable of aggregating kaolin particles to form small flocs. Manivasagan et al. [31] produced bioflocculant from *Streptomyces* sp MBRC-91.

Best flocculating activity was achieved with the highest concentration and time when alum, bioflocculant purified from *Bacillus subtilis* and *Moringa oleifera* seed powder was used in the treatment of water samples. Yuliastri et al. [32] used 80mg/l and 100mg/l of *Moringa oleifera* seed powder in ground water and wastewater treatment. The choice of dosage for *Moringa oleifera* seed powder is relative. *Bacillus muscilaginosus* MBFA9 isolated from soil sample had a good flocculating capability which achieved a flocculating rate of 99.6% for kaolin suspension at a dosage of 0.1ml/l [33]. A 20 mg/l bioflocculant dosage was sufficient in providing

more than 85% humic acid removal [34]. The dosage of bioflocculant used in water treatment is dependent on the source, composition and the method of purification of the bioflocculant.

Well water when treated with different combinations of alum, bioflocculant, chlorine and Moringa oleifera seed powder. There was general increase in the flocculating activities of each treatment combination after 24 hours of treatment. Combined therapy of alum and bioflocculant had the highest flocculating activity followed by the combined therapy of alum, bioflocculant, chlorine and Moringa oleifera seed powder. Alum recorded the lowest flocculating activity. The increase in the flocculating activity with time could be as a result of enough contact time of alum with the particles resident in the water. High flocculating activity recorded with combined use of alum and bioflocculant could be as a result of the fact that both alum and bioflocculants are flocculants. The difference only lies in the physical and chemical nature. The combined treatment of stream water also witnessed an increase in the flocculating activity of each treatment parameter, same was also experienced in the treatment of abattoir waste water. B proved to be the most effective flocculating agent for stream water while C brought about the lowest flocculating activity. The reason behind this cannot be farfetched as chlorine itself is a disinfecting agent and not a flocculant.

Coliform count of the water samples treated with alum, there was general reduction in the growth of coliform with respect to increased dosage and time. Bioflocculant purified from Bacillus subtilis totally eliminated coliform in well water after 24 hours of treatment. Coliform count of stream water was reduced to one. Moringa Oleifera proved more effective in the elimination of coliform than alum. After the treatment of the water samples with alum, total bacterial count was 20.00±0.58, 27.00± 0.33 & 41.00±1.52 respectively for well, stream and abattoir waste water. Treatment of well water with bioflocculant yielded 0.00±0.00, 1.33±0.33 and 77.0±0.58 for well. stream and abattoir waste water respectively. 22.00±1.15, 16.00±0.89 87.0±0.88 were the values gotten for the treatment of the above listed water samples with Moringa oleifera seed powder.

Singular chlorine therapy; combined therapy of bioflocculants and *Moringa oleifera* seed powder, combined therapy of bioflocculant and *Moringa oleifera* seed powder; combined therapy of

chlorine and Moringa oleifera seed powder; combined therapy of alum, bioflocculant and chlorine; combined therapy of alum, bioflocculant and chlorine; combined therapy of alum, bioflocculant and Moringa oleifera seed powder totally eliminated the coliform growth for well water sample. Singular Chlorine therapy; combined therapy of alum and Moringa oleifera seed powder; bioflocculant and Moringa oleifera seed powder; alum, bioflocculant and Moringa oleifera seed powder; alum, chlorine and Moringa oleifera seed powder; bioflocculant, chlorine and Moringa oleifera seed powder; and alum, bioflocculant, chlorine and Moringa oleifera seed powder worked effectively in the removal of coliform from stream water. Chlorine; alum and chlorine; chlorine and Moringa oleifera seed powder; alum, bioflocculant and chlorine; alum, bioflocculant and Moringa oleifera seed powder; alum, chlorine and Moringa oleifera seed powder; bioflocculant, chlorine and Moringa oleifera seed powder; and alum, bioflocculant, chlorine and Moringa oleifera seed powder totally eliminated coliform from abattoir waste water. Chlorine; alum and Moringa oleifera seed powder; alum and chlorine; chlorine and Moringa oleifera seed powder; alum, bioflocculant and chlorine; alum, chlorine and Moringa oleifera seed powder, bioflocculant, chlorine and Moringa oleifera seed powder: and alum, bioflocculant. chlorine and Moringa oleifera seed powder totally eliminated bacterial growth in well water. Alum and chlorine; chlorine and Moringa oleifera seed powder:alum, bioflocculant and Moringa oleifera seed powder totally eliminated bacterial growth in stream water. Moringa oleifera seed powder; chlorine and Moringa oleifera seed powder; alum, bioflocculant and Moringa oleifera seed powder; alum, chlorine and Moringa oleifera seed powder; bioflocculant, chlorine and Moringa oleifera seed powder totally eliminated bacterial growth in abattoir waste water.

5. CONCLUSION

Bioflocculant produced from *Bacillus subtilis* isolated from the stream sediment of Onyearugbulem market has exhibited maximum coagulating effect on well, stream, and abattoir water samples. The bioflocculant also exhibited inhibitory effect on the bacterial population in the water samples especially coliform bacteria.

This bioflocculant has proven to be more effective than its chemical counterpart, alum sulphate in water sediment coagulation and the inhibition of bacteria.

Moringa oleifera seed powder exhibited both coagulating and inhibitory effects on the water samples. Chlorine, a chemical disinfectant still proved more effective than Moringa oleifera seed powder.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

- Onda K, LoBuglio J, Bartram J. Global access to safe water: Accounting for water quality and the resulting impact on MDG progress. International Journal of Evironmental Research and Public Health. 2012;9(3):880-894.
- Chapman DV. World Health Organization. Water quality assessments: A guide to the use of biota, sediments and water in environmental monitoring; 1996.
- 3. Flury M. Experimental evidence of transport of pesticides through field soils—a review. Journal of Environmental Quality. 1996;25(1):25-45.
- Hellawell JM. (Ed.) Biological indicators of freshwater pollution and environmental management. Springer Science & Business Media. 2012;53-56.
- 5. Girards J. Principle of environment chemistry. Jones and Barlett, USA. 2005;12-13.
- Narfarnda WD, Yaji A, Kubkomawa HI. Impact of abattoir on aquatic life; A case study of Yola abattoir. Global Journal of Pure and Applied Science. 2006;12:31-33.
- 7. Ogbonnaya Chukwu. Analysis of ground water pollution from abattoir waste in minna, Nigeria. Research Journal of Diary Science. 2008;2(4);74-77.
- 8. Moghimipour E, Salimi A, Rezaee S, Balack M, Handali S. Influence of flocculating agents and structural vehicles on the physical stability and rheological behavior of nitrofurantoin suspension. Jundishapur Journal of Natural Pharmaceutical Products. 2014;9(2):24-32.
- Vasantharaj S, Sathiyavimal S, Hemashenpagam N. Treatment of municipal waste water with special reference to activated carbon combined with sand. Archives of Applied Science Research. 2013;5(3):90-92.
- Zaki S, Farag S, Elreesh GA, Elkady M, Nosier M, El Abd D. Characterization of

- bioflocculants produced by bacteria isolated from crude petroleum oil. International Journal of Environmental Science and Technology. 2011;8(4):831-840.
- Okaiyeto K, Nwodo UU, Mabinya LV, Okoh Al. Characterization of a bioflocculant produced by a consortium of Halomonas sp. Okoh and Micrococcus sp. Leo. International Journal of Environmental Research and Public Health. 2013;10(10): 5097-5110.
- Okaiyeto K, Nwodo UU, Mabinya LV, Okoli AS, Okoh AI. Characterization of a bioflocculant (MBF-UFH) produced by Bacillus sp. AEMREG7. International Journal of Molecular Sciences. 2015;16(6): 12986-13003.
- Nwodo UU, Green E, Mabinya LV, Okaiyeto K, Rumbold K, Obi CL, Okoh Al. Bioflocculant production by a consortium of Streptomyces and Cellulomonas species and media optimization via surface response model. Colloids and Surfaces Biointerfaces. 2014;116:257-264.
- Nwodo UU, Agunbiade MO, Green E, Mabinya LV, Okoh Al. A fresh water Streptomyces, isolated from Tyume River produces a predominantly extracellular Glycoprotein bioflocculant. International Journal of Molecular Science. 2012;13: 8679-8695.
- 15. Hussain I, Raschid L, Hanjra MA, Marikar F, Van Der Hoek W. Valuing impacts. Wastewater use in agriculture: Review of impacts and methodological issues in valuing impacts: With an extended list of bibliographical references. Colombo, Sri Lanka: International Water Management Institute. 2002;37.
- Elkady MF, Farag S, Zaki S, Abu-Elreesh G, Abd-El-Haleem D. Bacillus mojavensis strain 32A, a bioflocculant-producing bacterium isolated from an Egyptian salt production pond. Bioresource Technology. 2011;102(17):8143-8151.
- Amagloh FK, Benang A. Effectiveness of Moringa oleifera seed as coagulant for water purification. African Journal of Agricultural Research. 2009;4(2):119-123.
- Cosa S, Ugbenyen MA, Mabinya L, Vuyani I, Okoh IA. Characterization of a thermostable polysaccharide bioflocculant produced by *Virgibacillus* species isolated from Algoa bay. African Journal of

- Microbiology Research. 2013;7(23):2925-2938.
- Ugbenyen A, Cosa S, Mabinya L, Babalola OO, Aghdasi F, Okoh A. Thermostable bacterial bioflocculant produced by *Cobetia* spp. isolated from Algoa Bay (South Africa). International Journal of Environmental Research and Public Health. 2012;9(6):2108-2120.
- Ngwa NR, Chrysanthus N. Bacteriological analysis of well water sources in the bambui student residential area. Journal of Water Resource and Protection. 2013; 5(11):1013.
- Agwaranze DI, Ogodo A, Blessing NC, Agyo P. bacteriological examination of well water in wukari, Nigeria. International Journal of Scientific Research in Environmental Sciences. 2017;5:42-46.
- Nafarnda WD, Ajayi LE, Shawulu JC, Kawe MS, Omeiza GK, Sani NA, Tenuche OZ, Dantong DD, Tags SZ. Bacteriological Quality of Abattoir Efluents Discharged into water Bodies in Abuja, Nigeria. International Scholarly Research Network (ISRN) Veterinary Science. 2012;5.
- 23. Benka-Coker MO, Ojior OO. Effect of slaughterhouse wastes on the water quality of Ikpoba River, Nigeria. Bioresource Technology. 2012;52(1):5-12.
- Mittal GS. Treatment of wastewater from abattoirs before land application; a review. Bioresource Technology. 2006;97:1119-1135
- 25. Habtamu T, Kelali A, Shewit K. Food safety knowledge of abattoir butchery shops and the microbial profile of meat in mekelle city, Ethopia. Asian Pacific Journal of Tropical Biomedicine. 2013; 3(5):407-412.
- 26. Nandita D, Badaru O, Ayobami A, Adekeye BT. Microbiological assessment of agege abattoir situated in lagos state, Nigeria. International Organization of Scientific Research-Journal of Environmental Science, Toxicology and Food Technology (IOSR-JESTFT). 2015;9(9):86-93.
- Onuoha SC. The prevalence of antiobiotic resistant diarrhogenic bacterial species in surface waters, south eastern Nigeria. Ethiopian Journal of Health Science. 2017; 27(4):3019-3030.
- 28. Eniola KI, Olayemi B. Linear akylbenzene sulfonate tolerance in bacteria isolated fromsediments of Tropical water bodies polluted with detergents. Reviewed

- Biological Tropical Journal. 2008;56(4): 601-1595.
- 29. Ntozonke N, Okaiyeto K, Okoli AS, Olaniran AO, Nwodo UU, Okoh Al. A marine bacterium *Bacillus* sp isolated from the sediment samples of Algoa Bay in South Africa produces a polysaccharide bioflocculant. International Journal of Environmental Research and Public Health. 2017;14:1149-1157.
- Shimofuruya H, Koide A, Shirota K, Tsuji T, Nakamura M, Suzuki J. The production of flocculating substance(s) by Streptomyces griseus. Bioscience, Biotechnology, and Biochemistry. 1996; 60(3):498-500.
- 31. Manivasagan P, Kang KH, Kim DG, Kim SK. Production of polysaccharide-based bioflocculant for the synthesis of silver nanoparticles by *Streptomyces* sp.

- International Journal of Biological Macromolecules. 2015;77:159-167.
- 32. Yuliastri IR, Rohaeti E, Effendi H, Darusman LK. The use of *Moringa oleifera* seed powder as coagulant to improve the quality of wastewater and ground water. In IOP Conference Series: Earth and Environmental Science. 2016;31(1): 012033.
- Deng S, Bai R, Hu X, Luo Q. Characteristics of a bioflocculant produced by *Bacillus mucilaginosus* and its use in starch wastewater treatment. Applied Microbiology and Biotechnology. 2003; 60(5):588–593.
- 34. Zouboulis AI, Chai XL, Katsoyiannis IA. The application of bioflocculant for the removal of humic acids from stabilized landfill leachates. Journal of Environmental Management. 2004;70(1):35-41.

© 2019 Omiyale and Ekundayo; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (http://creativecommons.org/licenses/by/4.0), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:
The peer review history for this paper can be accessed here:
https://sdiarticle4.com/review-history/51293